


铜版纸157克, 双面印刷, 尺寸280x98mm, 四折五页, 风琴折




User Manual



D30

Powerful Deep Diving Flashlight

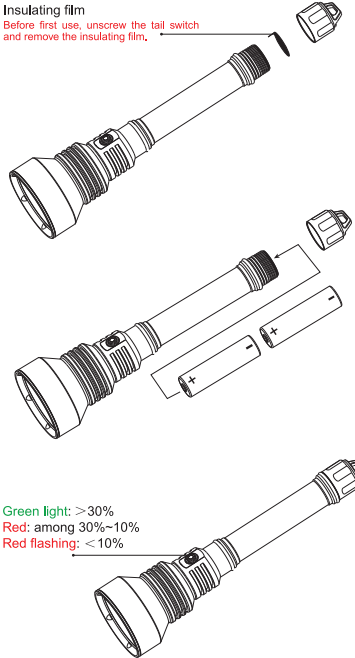

FEATURES

HIGH PERFORMANCE LED

- Powered by a SFT-90X LED, with a maximum brightness of 5,600 lumens and a beam distance of up to 1,454 meters
- 5° narrow beam angle; penetrates murky water, allowing you to see further and deeper

SIDE SWITCH FOR EASY OPERATION

- Enables quick transitions between Low, Medium, High, and SOS modes
- One-handed operation makes it easy to control in deep sea conditions

REPLACEABLE BATTERY DESIGN

- Includes 2 x 21700 batteries; easily swap them out for extended runtime during longer dives
- Battery level indicator alerts you when it's time to change batteries

DURABLE & SOLID

- Rated for 100m waterproof depth
- Three waterproof rings enhance sealing against water ingress, improving the overall durability of the flashlight
- Constructed from aircraft-grade aluminum with hard anodization, making it highly resistant to corrosion from saltwater

SIZE & WEIGHT

- Size: 267.93mm/10.55"(Length)x71mm/2.80"(Head Diameter) x 25.4mm/1"(Tube Diameter)
- Weight: 517g (18.23oz), including batteries

ACCESSORIES

1x D30 Flashlight; 1x Lanyard; 2x O-rings; 1x User Manual; 1x Warranty Card

TECHNICAL PARAMETER

| FL1 STANDARD | High             | Med              | Low         | SOS              |
|--------------|------------------|------------------|-------------|------------------|
|              | 5600~1800 lumens | 2300~1800 lumens | 1100 lumens | 3600~3000 lumens |
|              | 70s+ 2h40min     | 3min+ 2h40min    | 5h          | 3min+ 2h45min    |
|              | 1454m            | 811m             | 559m        | 1068m            |
|              | 528529 cd        | 164430 cd        | 78120 cd    | 285156 cd        |
|              | 100 meters       |                  | ✓           | 1.5 meters       |

Notice: The above-mentioned parameters have been measured in accordance with the international flashlight testing standard ANSI/PLATO FL1, and are approximate and may vary from flashlights, batteries, and environments. If you have any questions, please contact customer service.

OPERATIONS

On/Off:

Single press to turn on (memory mode); press and hold for 0.5s to turn off.

Change Settings:

While on, single press to cycle through Low, Med, High, SOS (Memorized).

Lock/Unlock:

While off, press and hold for 3s to lock (flash twice); While locked, press and hold for 3s to unlock (flash twice).

BATTERY POWER INDICATOR

| Battery Power | Indicator status |
|---------------|------------------|
| >30%          | Green            |
| 30%~10%       | Red              |
| <10%          | Red flashing     |

WARNING

1. By using this device, you certify you have read the included User Manual and Warning Card and release the manufacturer and retailers from all liabilities.
2. Please use in accordance with applicable laws and regulations.
3. Keep out of reach of children.
4. DO NOT shine the light directly into human eyes. This may cause temporary blindness, or permanent damage to the eyes.
5. DO NOT cover the light head when the flashlight is on, or place the flashlight head on the ground. The radiation energy of the flashlight may cause damage to the flashlight itself, or even result in burning to other materials.
6. DO NOT modify/disassemble the light, otherwise the user will be in charge of the all responsibility off the flashlight temporarily or turn it to low mode.
7. Please use turbo mode with caution, Turbo greatly reduces the runtime and leads to high temperature on the flashlight surface.
8. When the product is used in a low-temperature environment, please try and keep it warm. If the temperature is too cold, it may not reach the highest output.
9. If the product is left unused or carrier and transported, please lock the button to avoid accidentally activating the flashlight.
10. Please keep the front lens clean. Due to radiation energy, it may heat up foreign matter on the lens which can potentially cause damage.
11. The battery can only be stored inside the product and charged with the included standard charging cable.
12. Quality batteries with circuit protection will reduce the potential risk.

13. Store the battery with care. Please store the battery in a dedicated box after being taken out of the product if the battery needs to be changed.

USAGE AND MAINTENANCE

1. Unauthorized disassembly may damage the light and void the warranty.
2. Lubricate the threads with professional grade lubricant regularly.
3. Please swap out the O-rings regularly to maintain the water resistance level.
4. Maintain and keep clean any contact surfaces of the flashlight with alcohol swab. This may prevent irregular flashes during use.

PRODUCT WARRANTY

1. If the customer experiences any problems with an Acebeam product within 15 days of purchase, the dealer will replace that product.
2. If an Acebeam flashlight fails during normal use within a period of 10 year of purchase, the dealer will repair or replace the flashlight with the same or similar model.
3. ACEBEAM Batteries, accessories and lanterns with built-in batteries are warranted for a period of one year (12 months) from date of purchase.
4. The warranty does not cover damage or failure caused by:
  - A. Rough usage or operation which does not comply with the user manual or product specifications.
  - B. Unauthorized disassembly, repair or modification. Defects or damaged caused by factors out of Acebeam's control.
  - C. Battery leakage damaged products.
5. If there are any questions about ACEBEAM products, please consider the warranty and contact Acebeam or your original Acebeam dealer for warranty return instructions. Email: cs@acebeam.com

DISCLAIMER CLAUSE

Acebeam is not liable for damages or injuries sustained resulting from the usage of the product inconsistent with the warnings in the manual.




ACEBEAM TECHNOLOGY CO., LIMITED  
SHENZHEN ZENBON TECHNOLOGY CO., LTD  
+86 0755 23036551  
www.acebeam.com  
cs@acebeam.com

3/F, No.2 Building, Yijiang Industrial Park, Dalang,  
Longhua, Shenzhen 518100, Guangdong, China

Copyright © 2025 ACEBEAM. All rights reserved.  
Powered by Acebeam Technology Co., Ltd




说明书



D30

高性能强光深潜手电

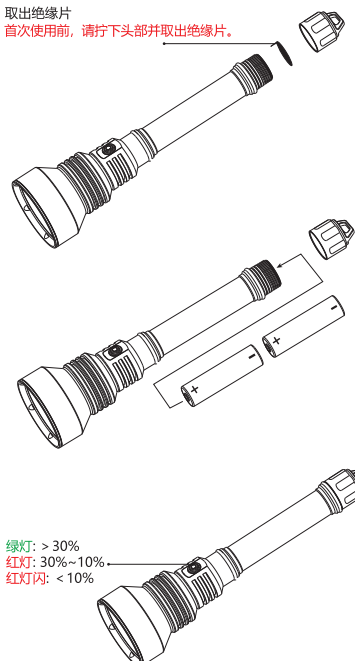

产品特性

高性能LED灯珠

- 搭载 SFT-90X LED灯珠, 最高亮度可达 5,600流明, 最远射程达 1,454米。
- 5°超窄光束角, 能强力穿透浑水域, 助您看得更深、更远。

侧按开关, 操作便捷

- 一键快速循环切换低亮 - 中亮 - 高亮 - SOS 四种模式。
- 支持单手操作, 即使在深海水域也能轻松掌控。

可更换电池设计

- 标配 2节 21700大容量电池, 长久续航; 可轻松更换电池, 满足长时间潜水需求。
- 电量指示灯实时提示, 让您及时掌握剩余电量, 避免电量焦虑。

坚固耐用, 专业防水

- 100米深度防水等级, 应对深海高压环境。
- 三重防水O圈密封设计, 全面防止水分渗入, 显著提升整体耐用性。
- 采用航空级铝合金机身结合硬质氧化工艺, 高度抗海水腐蚀。

尺寸 & 重量

- 尺寸: 267.93毫米(长)×71毫米(头部直径)×25.4毫米(筒身直径)
- 重量: 517克 (含电池)

包装清单

1x D30手电筒; 2x 备用防水圈; 1x 手绳; 1x 说明书; 1x 保修卡

性能参数

| SFT-90X LED  |              |              |          |              |
|--------------|--------------|--------------|----------|--------------|
| FL1 STANDARD | 高亮           | 中亮           | 低亮       | SOS          |
|              | 5600~1800 流明 | 2300~1800 流明 | 1100 流明  | 3600~3000 流明 |
|              | 70秒+ 2小时40分钟 | 3分钟+ 2小时40分钟 | 5小时      | 3分钟+ 2小时45分钟 |
|              | 1454m        | 811m         | 559m     | 1068m        |
|              | 528529坎德拉    | 164430坎德拉    | 78120坎德拉 | 285156坎德拉    |
|              | 100米         |              | ✓        | 1.5米         |

注: 以上数据按照国际手电筒测量标准ANSI/PLATO FL1所述之测量方法, 使用2节ACEBEAM 21700电池, 为ACEBEAM实验室实测, 具体使用需要根据实际环境而定, 如有疑问请联系客服。

操作步骤

开机:

单击开机 (记忆档位), 长按0.5秒关机。

切换档位:

开机后, 单击循环切换低-中-高-SOS (档位可记忆)。

锁键/解锁:

关机状态下, 长按3秒锁定 (闪烁2次); 锁定后, 长按3秒解锁 (闪烁2次)。

电量指示

| 电池电量    | 指示灯状态 |
|---------|-------|
| 大于30%   | 绿灯    |
| 30%~10% | 红灯    |
| 小于10%   | 红灯闪烁  |

警告

1. 使用前请先详细阅读包装内的说明书和警告标签, 并确保已经熟知并遵守。
2. 推荐使用合格且带有电路保护的电池。
3. 严禁在手电点亮时直接照射眼睛及皮肤, 以免造成视力损伤或皮肤灼伤, 并远离儿童。
4. 使用者需按当地法律法规及相关注意事项操作, 出现任何法律问题与制造商及销售商无关。

保养及注意事项

1. 请勿自行拆卸部件, 否则将会导致保修失效并可能损坏手电。
2. 灯具长时间以极亮档位工作会积累大量的热量并及时导出, 因此手电使用中发热是正常现象。
3. 长期使用, 手电筒尾部螺纹的润滑脂会减少, 为了保持螺纹顺滑, 请及时使用专业润滑脂来润滑螺纹。
4. 长期使用后, 手电的防水圈可能会老化。请您及时更换防水圈以维持手电的防水性能。
5. 请及时清洁手电的导电接触面以保证手电的正常工作, 尤其是当手电出现异常的闪烁或者无法点亮的时候, 有可能是接触面有污渍导致, 尝试用酒精棉签清洁导电接触面。
6. 由于锂电池会自放电, 所以建议您在长期不使用手电时将电池取出, 并至少每4个月为电池充电一次。

售后/保修条款

1. 15天保换: ACEBEAM产品自售出日起15天内, 在正常使用情况下, 如有任何质量问题, 均可向经销商要求免费更换。
2. 保修10年: ACEBEAM产品自售出日起10年内, 在正常使用情况下, 如有任何质量问题, 均可享受免费维修服务。
3. 电池类产品保修期为1年, 产品附加配件不在保修范围内。
4. 本条款不适用于以下情况:
  - A: 人为破坏, 拆解, 改装本产品;
  - B: 错误操作导致产品损坏 (如电池装反等);
  - C: 电池漏液导致产品损坏。
5. 如对ACEBEAM产品有任何疑问请参照保修条款并联系当地代理商或发邮件到cs@acebeam.com.

免责声明 Acebeam 对因不按照手册中的警告使用产品而造成的损害或伤害不承担任何责任。



www.Acebeam.com



FB: AcebeamWorld



FB Group: acebeam



深圳市纵邦科技有限公司  
+86-755-23036551  
www.acebeam.com  
cs@acebeam.com

深圳市龙华新区大浪街道华韵路300号亿佳扬工业园2栋3楼

Copyright © 2025 ACEBEAM.

深圳市纵邦科技有限公司对本说明书内容的最终解释权 and 修改权