


铜版纸157克, 双面印刷, 尺寸390x98mm, 五折六页, 风琴折




User Manual




W50 2.0

Zoomable LEP Flashlight

PRODUCT OVERVIEW

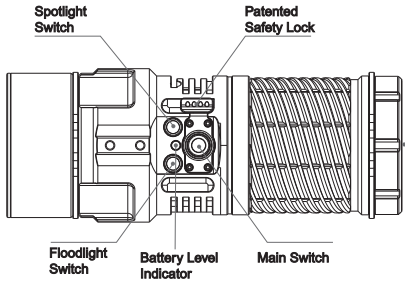

FEATURES

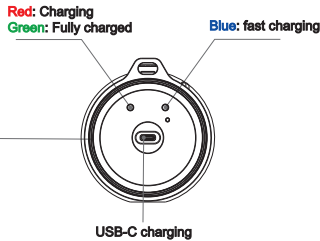

TECHNICAL PARAMETER

Min Focus				
FL1 STANDARD	High	Med	Low	Strobe
	1900~1050 lumens	680 lumens	230 lumens	680 lumens
	5min+ 2h40min	4.5h	9h	9h
	5062m	3197m	1907m	3197m
	6405961cd	2555202cd	909162cd	2555202cd
	IP68			1 meter

Max Focus				
FL1 STANDARD	High	Med	Low	Strobe
	2200~1250 lumens	824 lumens	284 lumens	824 lumens
	5min+ 2h40min	4.5h	9h	9h
	445m	270m	161m	270m
	49506cd	18225cd	6480cd	18225cd
	IP68			1 meter

Notice: The above-mentioned parameters have been measured in accordance with the international flashlight testing standard ANSI/PLATO FL1, (tested with 1 x ACEBEAM W50 2.0-BP rechargeable lithium-ion battery pack) and are approximate and may vary from flashlights, batteries, and environments. If you have any questions, please contact customer service.

ZOOMABLE LEP FLASHLIGHT

- Highly focused beam of light, which can reach impressive distances, providing better visibility in dark or expansive areas
- Max brightness of 2,200 lumens with a beam distance of up to 445 meters(Max Focus)
- Max brightness of 1,900 lumens with a beam distance of up to 5,062 meters(Min Focus)
- Easy focus adjustment to switch between floodlight and spotlight.

STABLE OUTPUT

- Highly efficient constant current circuit design

INTUITIVE SWITCHES

- Central main switch to turn on/off, change brightness levels, or activate Strobe
- Dual auxiliary switches used for focus adjustment

MECHANICAL LOCK

- Equipped with a mechanical lock switch to prevent accidental activation

CONVENIENT CHARGING

- Built-in rechargeable battery pack (8x18650 3100mAh batteries)
- Recharge via a hidden USB-C port shielded from dirt, moisture, and dust

CONVENIENT FEATURES

- The battery indicator displays the remaining battery level
- The standard tripod socket compatibility
- Detachable Handle

DURABLE & SOLID

- Made from aerospace-grade aluminum alloy with a hard-anodized finish
- Boast a rugged IP68 waterproof and dustproof rating
- 1m impact resistance

SIZE & WEIGHT

Size: 216.35mm/8.52"x84mm/3.31"x79mm/3.11"
Weight: 1660.9g/58.59oz

ACCESSORIES

1x W50 2.0 Flashlight; 1x Filter Cap; 1x Charging Cable;
1x Shoulder Strap; 1x Charger; 2x Spare Waterproof O-ring;
1x User Manual; 1x Warranty Card; 1x Qualification Certificate

OPERATIONS

Lock: Slide the mechanical lock to the left.

Unlock: Slide the mechanical lock to the right.

On/Off: Single press the main switch.

Change Brightness Levels: While on, long press the main switch to cycle through modes, Low → Medium → High. The current mode is memorized.

Strobe: Triple press the main switch.

Focus Adjustment: While on, press or long press the left auxiliary switch to zoom to Floodlight; Press or long press the right auxiliary switch to zoom to Spotlight.

WARNING

1.W50 2.0 is a high intensity lighting device. Please note:
DO NOT aim this light directly at eyes or exposed skin to prevent injuries or eye damage.

DO NOT aim at another person,
DO NOT aim at mirrors, glasses or other reflective surfaces,
DO NOT aim at aircraft or vehicles in operation.
Keep this flashlight out of the reach of Children.

2.By using this device, you certify you have read the included User Manual and Warning Card,operate in accordance with local laws and regulations and related precautions,and release the manufacturer and sellers from all liabilities.

3.There is a patented safety lock next to the Main button to prevent unauthorized use or accidental touch, and it can be completely powered off. Please remember to lock the Safety Lock once finished using the light.

4.Applications must be treated with caution and handled with care.

5.By using this device, you certify you have read the included User Manual and Warning Card and release the manufacturer and retailers from all liabilities.

6.Please use in accordance with applicable laws and regulations.


7.Keep out of reach of children.

8.DO NOT shine the light directly into human eyes. This may cause temporary blindness, or permanent damage to the eyes.

9.DO NOT cover the light head when the flashlight is on, or place the flashlight head on the ground. The radiation energy of the flashlight may cause damage to the flashlight itself, or even result in burning to other materials.





User Manual

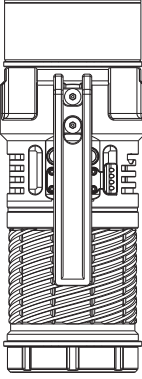

W50 2.0

LEP变焦手电筒

产品概览

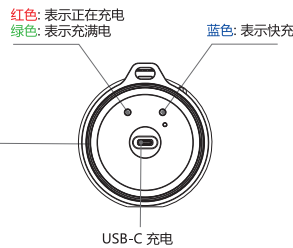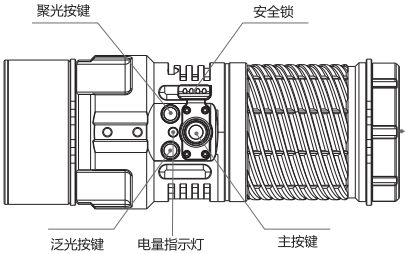

性能参数

最小聚光				
FL1 STANDARD	高亮	中亮	低亮	爆闪
	1900~1050 流明	680 流明	230 流明	680 流明
	5分钟+ 2小时40分钟	4.5小时	9小时	9小时
	5062m	3197m	1907m	3197m
	6405961 坎德拉	2555202 坎德拉	909162 坎德拉	2555202 坎德拉
	IP68			1米

最大泛光				
FL1 STANDARD	高亮	中亮	低亮	爆闪
	2200~1250 流明	824 流明	284 流明	824 流明
	5分钟+ 2小时40分钟	4.5小时	9小时	9小时
	445m	270m	161m	270m
	49506 坎德拉	18225 坎德拉	6480 坎德拉	18225 坎德拉
	IP68			1米

注：以上数据按照国际手电筒测量标准ANSI/PLATO FL1所述之测量方法，以上数据为1个W50 2.0-BP锂电池组测试，为ACEBEAM实验室实测，具体使用需要根据实际环境而定，如有疑问请联系客服。

产品特性

可变焦LEP手电

- 光线高度聚焦，射程惊人，在黑暗或广阔区域提供更佳视野。
- 最大亮度 2,200 流明，最远射程达 445 米（泛光）。
- 最大亮度 1,900 流明，最远射程达 5,062 米（聚光）。
- 可轻松调节焦距，切换泛光与聚光。

稳定输出

- 高效恒流电路设计，保障光线稳定不衰减。

直观开关布局

- 中央主开关控制开关机、切换亮度档位（低-中-高）及启用爆闪模式。
- 双辅助开关专用于快速调节焦距。

机械锁设计

- 配备机械锁开关，有效防止误触启动，保障携带与储存安全。

便捷充电

- 内置可充电电池组（8节18650 3100mAh锂离子电池）。
- 隐藏式 USB-C 接口，防尘防潮防泥沙。

实用功能

- 电池电量指示灯，实时显示剩余电量。
- 标准三脚架接口，兼容摄影及固定支架配件。
- 可拆卸手柄

坚固耐用

- 航天级铝合金材质，硬质氧化表面处理。
- IP68 级防尘防水，无惧恶劣环境。
- 承受 1 米跌落冲击，可靠耐用。

尺寸与重量

- 尺寸：216.35毫米 × 84毫米 × 79毫米
- 重量：1660.9 克

包装清单

1x W50 2.0 手电; 1x 充电器; 1x USB-C充电线; 1x 滤镜;
2x O 形圈; 1x 肩带; 1x 用户手册; 1x 保修卡; 1x 合格证

操作步骤

锁键：将机械锁向左推动。

解锁：将机械锁向右推动。

开机/关机：单击主按键。

切换档位：开机状态下，长按主按键，按低亮-中亮-高亮顺序循环切换，当前档位会启动记忆。

爆闪：快速三击主按键。

调焦：开机状态下，单击或长按左侧辅按键（泛光）；单击或长按右侧辅按键（聚光）。

警告

1.W502.0是一款高强度照明工具，切勿直射眼睛。

严禁在手电点亮时直接照射眼睛及皮肤，以免造成视力损伤或皮肤灼伤，并远离儿童。

严禁照射任何人体。

严禁照射镜子，玻璃或表面可能反光的物体。

严禁照射行进的飞机和汽车。

2.主按键旁边设有专利“安全锁”，防止他人擅自使用或误触，并可完全切断电源。使用完毕后，请记住锁定开关！

3.使用者需按当地法律法规及相关注意事项操作，出现任何法律问题与制造商及销售商无关。

4.使用前先详细阅读包装内的说明书和警告标签，并确保已经熟知并遵守。

5.所有操作及护理都需小心谨慎。

保养及注意事项

1. 请勿自行拆卸部件，否则将会导致保修失效并可能损坏手电。

2. 灯具长时间以极亮档位工作会积累大量的热量并及时导出，因此手电使用中发热是正常现象。

3. 长期使用，手电尾部螺纹的润滑油会减少，为了保持螺纹顺滑，请及时使用专业润滑油来润滑螺纹。

4. 长期使用后，手电的防水圈可能会老化，请您及时更换防水圈以维持手电的防水性能。

5. 请及时清洁手电的导电接触面以保证手电的正常工作，尤其是当手电出现异常的闪烁或者无法点亮的时候，有可能是接触面有污渍导致，尝试用酒精棉签清洁导电接触面。

6. 由于锂电池会自放电，所以建议您在长期不使用手电时将电池取出，并至少每4个月为电池充电一次。

7. 此手电防水效果优良，但不可作为专业潜水手电使用。

9.DO NOT cover the light head when the flashlight is on, or place the flashlight head on the ground. The radiation energy of the flashlight may cause damage to the flashlight itself, or even result in burning to other materials.

10.DO NOT modify/disassemble the light, otherwise the user will be in charge of the all responsibilities.

11.Please use turbo mode with caution. Turbo greatly reduces the runtime and leads to high temperature on the flashlight surface.

12.When the product is used in a low- temperature environment, please try and keep it warm. If the temperature is too cold, it may not reach the highest output.

13.If the product is left unused or carrier and transported, please lock the button to avoid accidentally activating the flashlight.

14.Please keep the front lens clean. Due to radiation energy, it may heat up foreign matter on the lens which can potentially cause damage.

15.The battery can only be stored inside the product and charged with the included standard charging cable.

16.Quality batteries with circuit protection will reduce the potential risk.

17.Store the battery with care. Please store the battery in a dedicated box after being taken out of the product if the battery needs to be charged.

PRODUCT WARRANTY

1.If the customer experiences any problems with an Acebeam product within 15 days of purchase, the dealer will replace that product.

2.We offer warranty within 10 years of purchase if problems develop with normal use for LED model, 12 months for LEP model, battery, battery pack, charger, remote switch and other accessories.

3.The warranty for the built-in battery is 2 years, and accessories are not covered under the warranty.

4.The warranty does not cover damage or failure caused by:

A. Rough usage or operation which does not comply with the user manual or product specifications.

B. Unauthorized disassembly, repair or modification, Defects or damaged caused by factors out of Acebeam's control.

C. Battery leakage damaged products.

5.If there are any questions about ACEBEAM products, please consider the warranty and contact Acebeam or your original Acebeam dealer for warranty return instructions.
Email: cs@acebeam.com

DISCLAIMER CLAUSE

Acebeam is not liable for damages or injuries sustained resulting from the usage of the product inconsistent with the warnings in the manual.



www.Acebeam.com



FB: AcebeamWorld



FB Group: acebeam

"Follow" us for more information about Acebeam.



ACEBEAM TECHNOLOGY CO., LIMITED
SHENZHEN ZENBON TECHNOLOGY CO., LTD

+86 0755-23036551

www.acebeam.com

cs@acebeam.com

3/F, No.2 Building, Yijiang Industrial Park, Dalang,
Longhua, Shenzhen 518100, Guangdong, China

Copyright © 2025 ACEBEAM. All rights reserved.
Powered by Acebeam Technology Co., Ltd

售后/保修条款

1. 15天保换：ACEBEAM产品自售出日起15天内，在正常使用的情况下，如有任何质量问题，均可向经销商要求免费更换。

2. 保修1年：ACEBEAM产品自售出日起1年内，在正常使用的情况下，如有任何质量问题，均可享受免费维修服务。

3. 内置电池保修期为2年，产品附加配件不在保修范围内；

4. 本条款不适用于以下情况：
A: 人为破坏，拆解，改装本产品；
B: 错误操作导致产品损坏（如电池装反等）；
C: 电池漏液导致产品损坏。

5. 如对ACEBEAM产品有任何疑问请参照保修条款并联系当地代理商或发邮件到cs@acebeam.com.

免责声明 Acebeam 对因不按照手册中的警告使用产品而造成的损害或伤害不承担任何责任。



www.Acebeam.com



FB: AcebeamWorld



FB Group: acebeam

