


铜版纸157克, 双面印刷, 尺寸390x85mm, 五折六页, 风琴折

ACEBEAM
—Light Where You Want It—

User Manual




X30

Dual-Source Searching Flashlight With Three Modes

PRODUCT OVERVIEW

BATTERY LEVEL INDICATOR

Green light: 100%~30%,
Red light: among 30%~ 10%, low battery warning
Red flash light: below < 10%

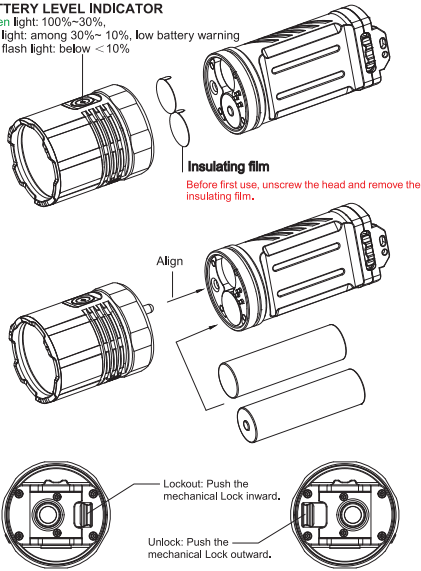

SELECT MODES BY THE TOGGLE SWITCH

SLIDE TO THE LEFT: TACTICAL MODE

TAIL SWITCH
Half Press: Turbo
Half Press and Hold: Momentary Turbo
Full Press: Strobe
Full Press and Hold: Momentary Strobe

SIDE SWITCH

Single Press: Turn on (memorized setting) or Turn off.
Long press: While off, long press to enter Ultra Low; while on, long press to cycle through Low, Med 1, Med 2, High.
Double Press: Turbo Triple Press: Strobe

SLIDE TO THE MIDDLE: RED LIGHT MODE

TAIL SWITCH
Half Press: Turbo
Half Press and Hold: Momentary Turbo
Full Press: Strobe
Full Press and Hold: Momentary Strobe

SIDE SWITCH

Single Press: Turn on (memorized setting) or Turn off.
Long press: While off, long press to enter Ultra Low; while on, long press to cycle through Low, Med 1, Med 2, High.
Double Press: Turbo Triple Press: Strobe

SLIDE TO THE RIGHT: DUTY MODE

TAIL SWITCH
Half Press: While off, half press to enter Ultra Low; while on, single press to cycle through Low, Med 1, Med 2, High.
Full Press: While off, full press to enter memorized setting; while on, full press to turn off.

SIDE SWITCH

Single Press: Turn on (memorized setting) or Turn off.
Long press: While off, long press to enter Ultra Low; while on, long press to cycle through Low, Med 1, Med 2, High.
Double Press: Turbo Triple Press: Strobe

NOTE

When powered on, slide the magnetic toggle switch:
Slide to Tactical Mode: Enter Turbo
Slide to Red Light Mode: Enter Red Light Turbo
Slide to Duty Mode: Enter the memorized setting

FEATURES

POWERFUL OUTPUT

- Featuring 3 x CREE XHP70.2 LEDs, it delivers an impressive 20,000 lumens of brightness and a beam distance of up to 600 meters
- The balanced circuit enables more consistent high performance by providing stable power output, helping sustain high brightness over an extended period

DUAL LIGHT SOURCES & THREE MODES

- Dual light sources, White and Red Light
- Three modes, Tactical, Red Light and Duty Mode, selected by a toggle switch
- COVENIENT CHARGING & BATTERY REPLACEMENT
- Hidden USB-C charging port to withstand dirt, moisture, and dust, your dependable partner in challenging environments
- Powered by two 21700 high-drain batteries, it offers exceptional battery performance and sustained power, ensuring efficient delivery
- Its replaceable battery design allows you to regain full power by swapping in spare batteries
- The battery indicator clearly displays remaining level, reminding you when it's time to recharge

MECHANICAL LOCK

- Mechanical lock for dual-switch (tail and side switch) full lockout. The flashing light feedback confirms a successful lock or unlock
- ENHANCED GLASS-BREAKING PERFORMANCE
- Strike bezel shatters glass with ease and serves as a decisive tool, helping you protect yourself in critical moments

BUILT TO ENDURE

- Crafted from aerospace-grade AL6061-T6 aluminum and a hard-anodized finish to survive 1-meter drops
- Its IP68 rated protection ensures reliable performance in severe weather

SUITABLE SIZE FOR ONE-HANDED GRIP

- Size: 159.7mm/6.29"(Length) x 52.5mm/2.07"(Head Dia.) x 46.8mm/1.84"(Body Dia.), Weight: 473.7g/16.71oz (incl. batteries)

ACCESSORIES

1 x X30 Flashlight; 2 x 21700 Batteries; 1 x Holster; 1 x USB-C Charging Cable;
2 x Waterproof O-rings; 1 x Lanyard; 1 x User Manual; 1 x Warranty Card;
1 x Qualification Certificate

TECHNICAL PARAMETER

LED	RT STANDARD	Turbo	High	Med2	Med1	Low	Ultra-Low	Strobe
3 x XHP70.2 6500K LED		20000~3000 lumens	3000 lumens	1300 lumens	500 lumens	200 lumens	40 lumens	20000~3000 lumens
		15s+1h50min	1h55min	4h30min	11h30min	26h	58h	15s+4h
		600m	170m	111m	70m	44m	15m	600m
		90000cd	7225cd	3080cd	1225cd	484cd	56cd	90000cd
SLIDE	RT STANDARD	Turbo	High	Med	Low	Ultra-Low	Strobe	
3 x Red Light LED		300 lumens	134 lumens	70 lumens	33 lumens	15 lumens	300 lumens	
		5.7h	19h	36h	60h	87h	12h	
		2 meters				1 meter		

Notice: The above-mentioned parameters (tested with 2 x 21700 batteries) have been measured in accordance with the international flashlight testing standard ANSI/PLATO FL1, and are approximate and may vary from headlamps, batteries, and environments. If you have any questions, please contact customer service.

WARNING


- Before use, carefully read the user manual and warning manual included in the packaging, and ensure full understanding and compliance.
- It is recommended to use qualified batteries equipped with circuit protection.
- Never shine the flashlight directly into eyes or onto skin when illuminated, to avoid vision damage or skin burns. Keep out of reach of children.
- Users must operate in accordance with local laws, regulations, and relevant precautions. The manufacturer and seller shall not be held liable for any legal issues arising therefrom.

MAINTENANCE & NOTES

- Do not disassemble any components by yourself, as this will void the warranty and may damage the flashlight.
- Prolonged operation at maximum brightness will generate and rapidly conduct significant heat. Therefore, heating during use is normal.
- With extended use, the lubricant on the tail threads may diminish. To maintain smooth threading, apply specialized lubricant promptly.

ACEBEAM
—Light Where You Want It—

User Manual

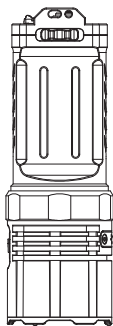


X30

双光源 三模式搜索手电

产品概览

电量显示

绿光: 100%~30%;
红光: 30%~10%之间, 此时低电量提醒;
红灯闪: < 10%

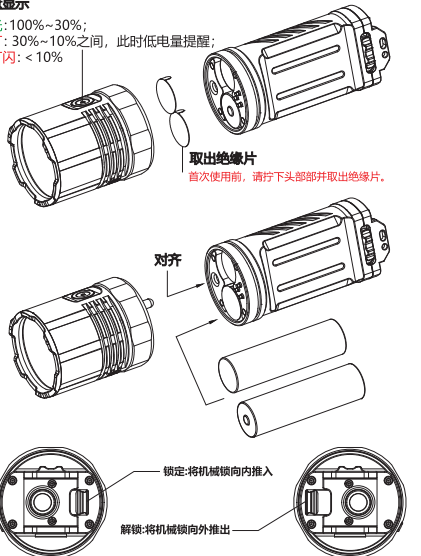

磁控开关模式设定

推至左边 战术模式

尾按键
轻按: 极亮
轻按长按: 瞬闪极亮
重按: 爆闪
重按长按: 瞬闪爆闪

侧按键

单击: 开关机, 开机进入记忆档位
长按: 关机时长按进入极低档; 开机后长按循环切换「低→中1→中2→高亮→低」
双击: 极亮
三击: 爆闪

推至中间 红光模式

尾按键
轻按: 极亮
轻按长按: 瞬闪极亮
重按: 爆闪
重按长按: 瞬闪爆闪

侧按键

单击: 开关机, 开机进入记忆档位
长按: 关机时长按进入极低档; 开机后长按循环切换「低→中1→中2→高亮→低」
双击: 极亮
三击: 爆闪

推至右边 勤务模式

尾按键
轻按: 关机状态进入极低亮; 开机后继续单击循环切换「低→中1→中2→高亮→低」
重按: 关机时进入记忆档位; 开机时重按直接关机

侧按键

单击: 开关机, 开机进入记忆档位
长按: 关机时长按进入极低档; 开机后长按循环切换「低→中1→中2→高亮→低」
双击: 极亮
三击: 爆闪

提示

开机时拨动磁控开关:
拨到战术模式: 进入极亮
拨到红光模式: 进入红光极亮
拨到勤务模式: 进入记忆档位

产品特性

强悍性能输出

- 搭载3颗CREE XHP70.2 LED灯珠, 带来20000流明的惊人亮度与600米的照射距离
- 均衡电路提供稳定输出, 实现更持久的高性能表现

双光源&三模式

- 配备白光与红光双光源
- 通过拨杆磁控开关可快速切换三种模式: 战术模式、红光模式、勤务模式

便捷充电与电池更换

- 隐藏式USB-C充电口有效抵御尘土、潮湿与沙尘侵袭, 是严苛环境中值得信赖的伙伴
- 采用两节21700高倍率电池供电, 提供卓越的续航能力和持续动力输出
- 可更换电池设计让您能通过备用电池快速恢复电量
- 电池电量指示灯清晰显示剩余容量, 及时提醒充电时机

机械锁定防护

- 双开关(尾按/侧按)全锁定机械键锁, 操作时通过闪烁灯光反馈确认锁定/解锁状态

强化破窗能力

- 攻击头设计可轻松击碎玻璃, 是关键时刻保护自己的可靠工具

坚固耐用结构

- 采用航空级AL6061-T6铝合金机身配合硬质氧化工艺, 1米防跌高度
- IP68级防护确保在恶劣天气条件下仍能可靠运作

人性化单手握持尺寸

- 尺寸: 159.7毫米(长) x 52.5毫米(头部直径) x 46.8毫米(筒身直径)
- 重量: 473.7克(含电池)

包装清单

1 x X30手电筒; 2 x 21700电池; 1 x 布套; 1 x USB-C充电线; 2 x O圈;
1 x 手绳; 1 x 用户手册; 1 x 保修卡; 1 x 合格证书

性能参数

RT STANDARD	极亮	高亮	中亮2	中亮1	低	极低亮	爆闪
3 x XHP70.2 6500K 灯珠	20000~3000流明 15秒+ 1小时50分钟	3000流明 1小时 55分钟	1300流明 4小时 30分钟	500流明 11小时 30分钟	200流明 26小时 58小时	40流明 58小时 15秒+ 4/小时	20000~3000流明 15秒 1小时50分钟
	600米	170米	111米	70米	44米	15米	600米
	90000坎德拉	7225坎德拉	3080坎德拉	1225坎德拉	484坎德拉	56坎德拉	90000坎德拉
RT STANDARD	极亮	高亮	中亮	低	极低亮	爆闪	
3 x 红灯	300流明 5.7小时	134流明 19小时	70流明 36小时	33流明 60小时	15流明 87小时	300流明 12小时	
	2米	2米	2米	2米	2米	1米	

注: 以上数据按照国际手电筒测量标准ANSI/PLATO FL1所述之测量方法, 使用2 x ACEBEAM 21700电池, 为ACEBEAM实验室实测, 具体使用需要根据实际环境而定, 如有疑问请联系客服。

警告

- 使用前请先仔细阅读包装内的说明书和警告标签, 并确定已经熟知并遵守。
- 推荐使用合格且带有电路保护的电池。
- 严禁在手电点亮时直接照射眼睛及皮肤, 以免造成视力损伤或皮肤灼伤, 并远离儿童。
- 使用者需按当地法律法规及相关注意事项操作, 出现任何法律问题与制造商及销售商无关。

保养及注意事项

- 请勿自行拆卸部件, 否则会导致保修失效并可能损坏手电。
- 灯具长时间以极亮档位工作会积累大量的热量并及时导出, 因此手电使用中发热是正常现象。
- 长期使用, 手电筒尾部螺纹的润滑油会减少, 为了保持螺纹顺滑, 请及时使用专业润滑油来润滑螺纹。

- Over time, the flashlight's O-rings may deteriorate. Replace them periodically to preserve the waterproof integrity.
- Regularly clean the flashlight's electrical contact surfaces to ensure proper operation. If abnormal flickering or failure to turn on occurs, it may be due to dirty contacts. Try cleaning them with an alcohol swab.
- Lithium batteries may undergo self-discharge. For long-term storage, remove the battery and recharge it at least once every four months.
- This flashlight offers excellent waterproof performance but is not intended for professional diving use.

PRODUCT WARRANTY

- If the customer experiences any problems with an Acebeam product within 15 days of purchase, the dealer will replace that product.
- If an Acebeam flashlight fails during normal use within a period of 10 year of purchase, the dealer will repair or replace the flashlight with the same or similar model.
- The battery comes with a one-year(12 months) warranty from date of purchase. And the warranty does not cover additional accessories.
- The warranty does not cover damage or failure caused by:
 - Rough usage or operation which does not comply with the user manual or product specifications.
 - Unauthorized disassembly, repair or modification. Defects or damaged caused by factors out of Acebeam's control.
 - Battery leakage damaged products.
- If there are any questions about ACEBEAM products, please consider the warranty and contact Acebeam or your original Acebeam dealer for warranty return instructions. Email: cs@acebeam.com

Acebeam is not liable for damages or injuries sustained resulting from the usage of the product inconsistent with the warnings in the manual.

ACEBEAM TECHNOLOGY CO., LIMITED
SHENZHEN ZENBON TECHNOLOGY CO., LTD

+86 0755 23036551
www.acebeam.com

cs@acebeam.com

3/F, No.2 Building, Yijiyang Industrial Park, Dalang,
Longhua, Shenzhen 518100, Guangdong, China

Copyright © ACEBEAM. All rights reserved.
Powered by Acebeam Technology Co., Ltd.



- 长期使用后, 手电的防水圈可能会老化。请您及时更换防水圈以维持手电的防水性能。
- 请及时清洁手电的导电接触面以保证手电的正常工作, 尤其是当手电出现异常的闪烁或者无法点亮的时候, 有可能是接触面有污渍导致, 尝试用酒精棉签清洁手电接触面。
- 由于锂电池会自放电, 所以建议您在长期不使用手电时将电池取出, 并至少每4个月为电池充电一次。
- 此手电防水效果优良, 但不可作为专业潜水手电使用。

售后/保修条款

- 15天保换: ACEBEAM产品自售出日起15天内, 在正常使用情况下, 如有任何质量问题, 均可向经销商要求免费更换。
- 保修10年: ACEBEAM产品自售出日起10年内, 在正常使用情况下, 如有任何质量问题, 均可享受免费维修服务。
- 电池保修期为1年, 产品附加配件不在保修范围内。
- 本条款不适用于以下情况:
 - A: 人为破坏, 拆解, 改装本产品;
 - B: 错误操作导致产品损坏(如电池装反等);
 - C: 电池漏液导致产品损坏。
- 如对ACEBEAM产品有任何疑问请参照保修条款并联系当地代理商或发邮件到cs@acebeam.com.

免责声明 Acebeam 对因不按手册中的警告使用产品而造成的损害或伤害不承担任何责任。



www.Acebeam.com



FB: AcebeamWorld



FB Group: acebeam



深圳市纵邦科技有限公司

+86-755-23036551

www.acebeam.com

cs@acebeam.com

深圳市龙华新区大浪街道华韵路300号亿佳场工业园2栋3楼

Copyright © ACEBEAM.

深圳市纵邦科技有限公司有对本说明书内容的最终解释权 and 修改权